

PH. 828-683-7348 FAX 828-683-9902
 25 HEMLOCK RIDGE ROAD
 LEICESTER NORTH CAROLINA 28748
 email: rick@rickjacksdesign.com
 rick jacks/design

REVISIONS


THE DESIGN AND CONSTRUCTION OF THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THE ARCHITECT. NO REPRODUCTION OR TRANSMISSION OF THIS DRAWING AND/OR CONTENTS WITHOUT WRITTEN PERMISSION OF THE ARCHITECT IS PROHIBITED.



project no. 2K70609
 dwn by: RICK
 date: AUG. 18, 2008
 scale: AS SHOWN
 sheet no: A7

new facility for:
washington seventh day baptist church
 CRITTENDEN @ 16TH WASHINGTON, D.C.

project no. 2K70609
 dwn by: RICK
 date: AUG. 18, 2008
 scale: AS SHOWN
 sheet no: A7

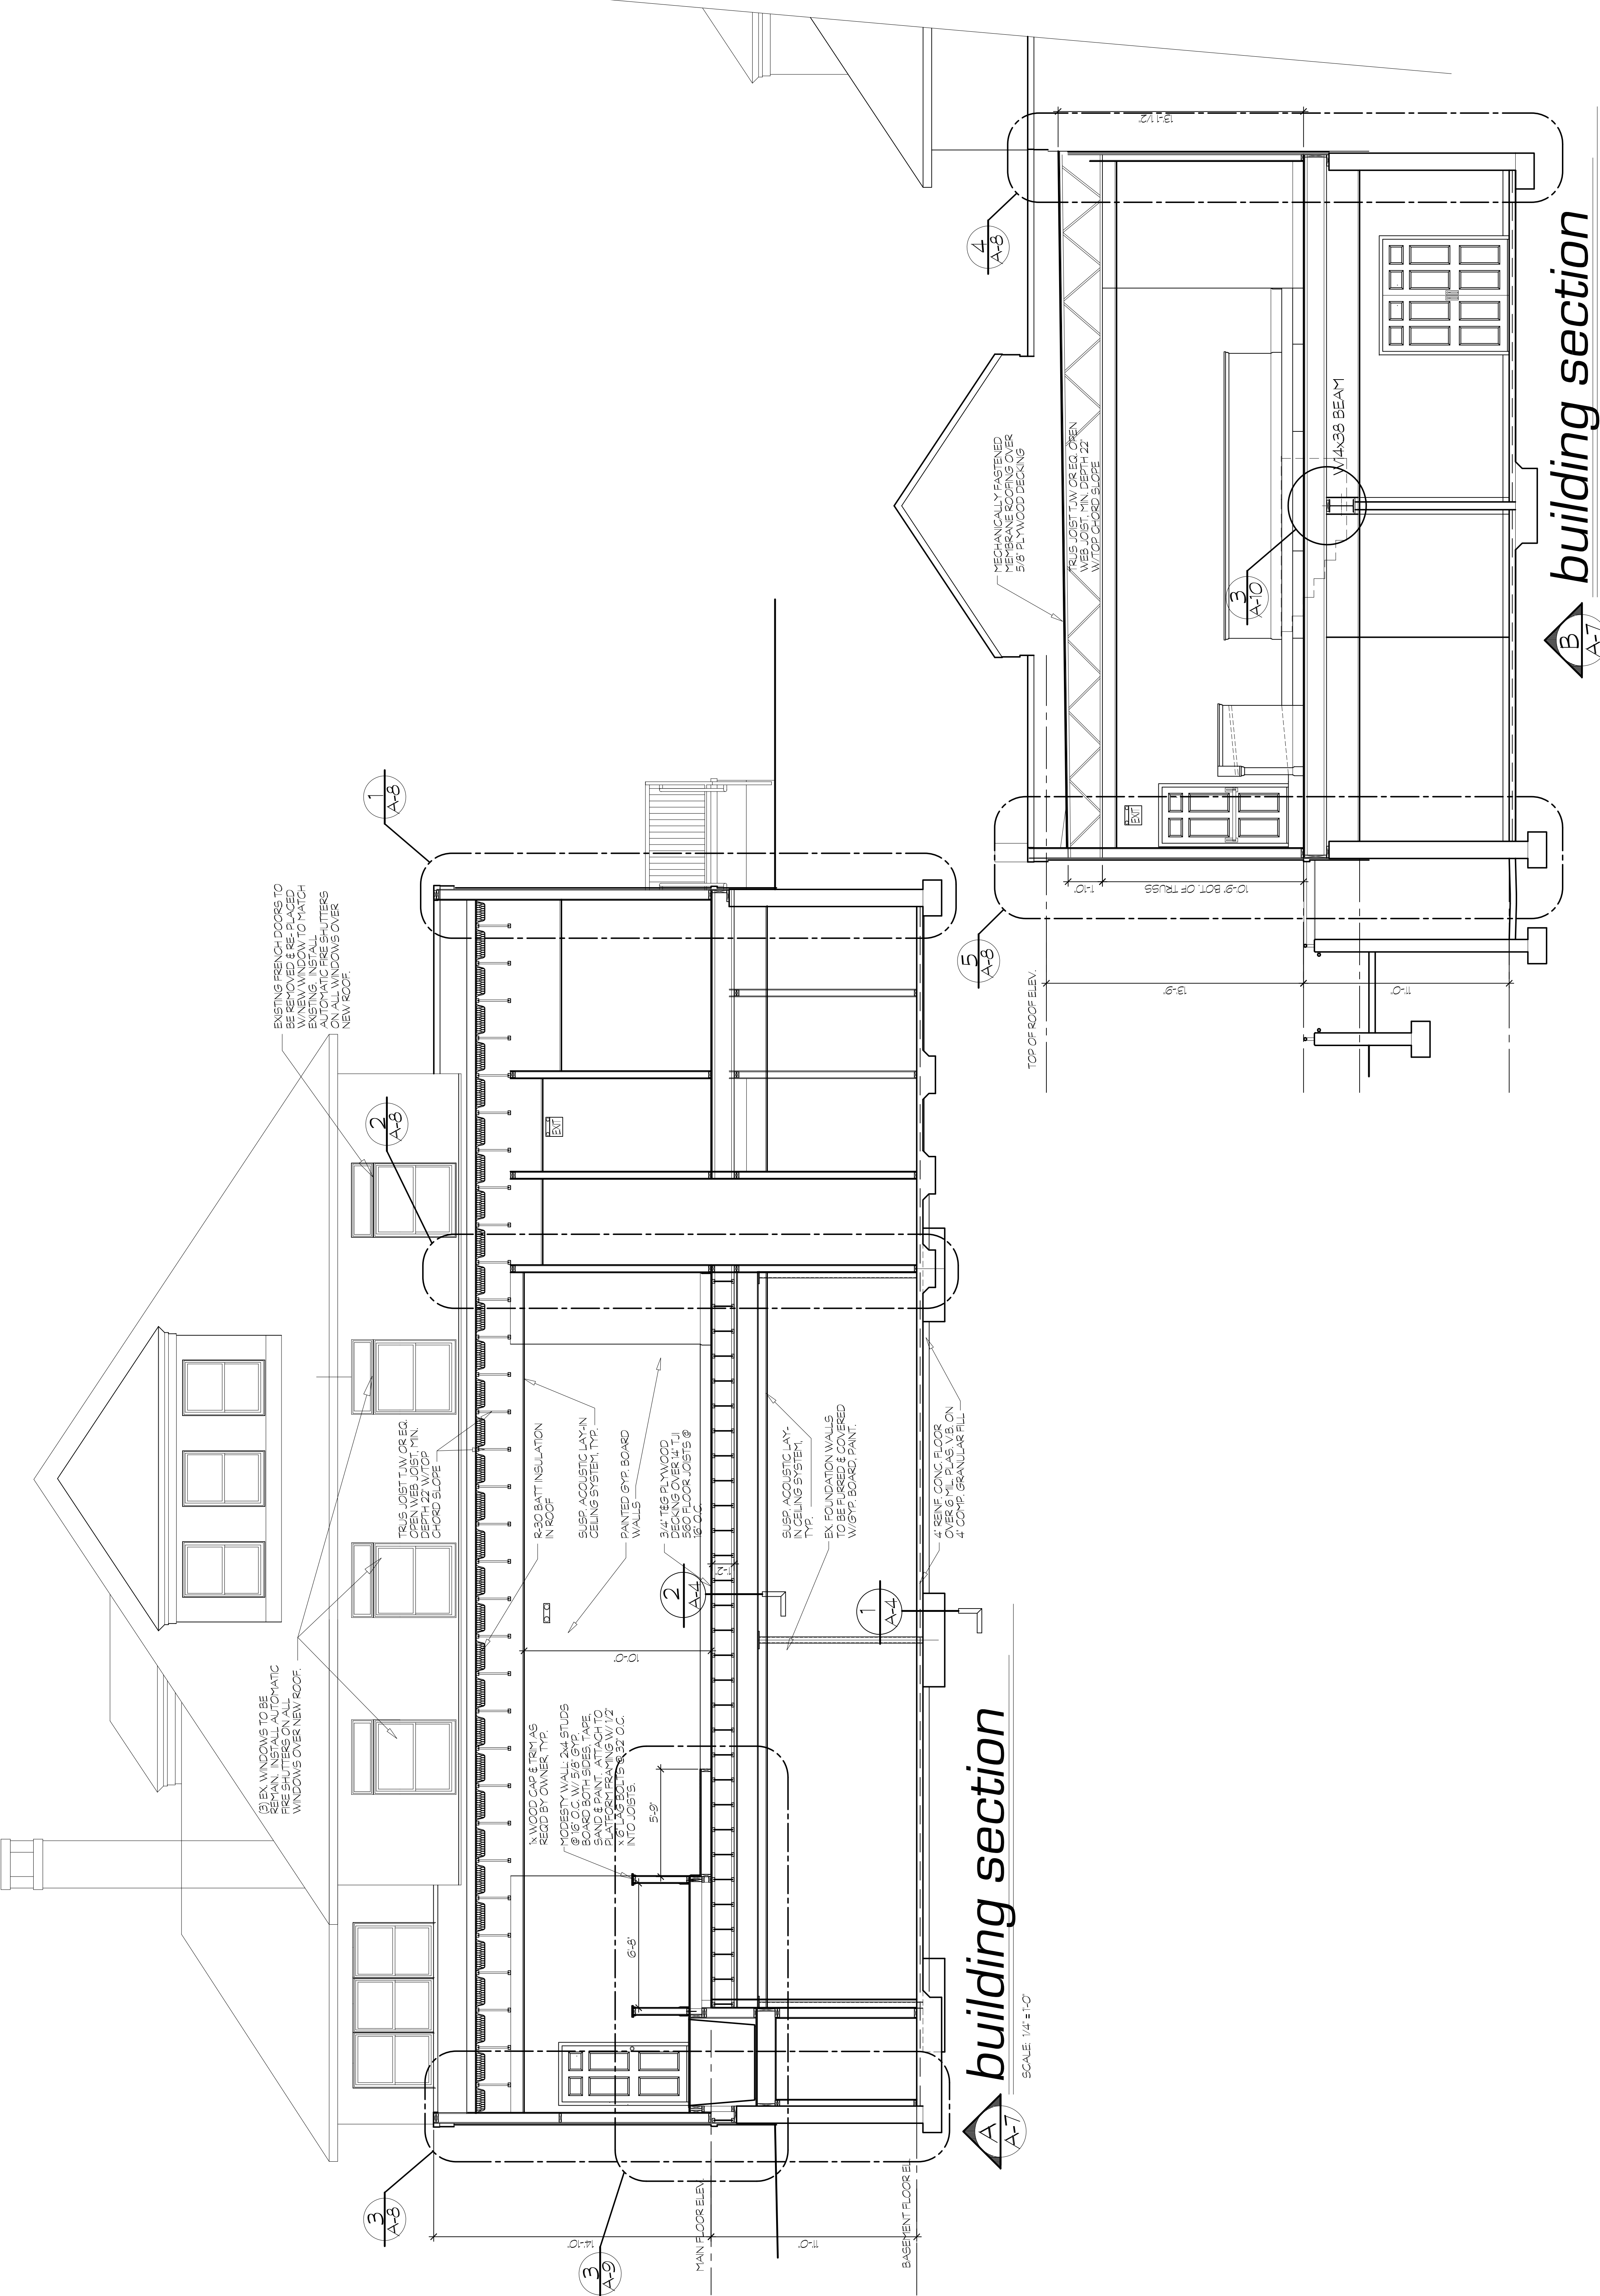

building section
 SCALE: 1/4" = 1'-0"

building section
 SCALE: 1/4" = 1'-0"

EXISTING FRENCH DOORS TO BE RE-PAINTED & CEILING W/ NEW W/ GYP BOARD. EXISTING W/ NEW W/ GYP BOARD TO MATCH EXISTING. INSTALL AUTOMATIC FIRE SHUTTERS ON ALL WINDOWS OVER NEW ROOF.

EXISTING WINDOWS TO BE RE-PAINTED. INSTALL AUTOMATIC FIRE SHUTTERS ON ALL WINDOWS OVER NEW ROOF.

R-30 BATT INSULATION IN ROOF

SUPER ACUSTIC LAY-IN CEILING SYSTEM, TYP.

PAINTED GYP BOARD WALLS

3/4" T&G B. WOOD DECKING OVER 1" TJI 560 FLOOR JOISTS @ 16" O.C.

SUPER ACUSTIC LAY-IN CEILING SYSTEM, TYP.

EX FOUNDATION WALLS TO BE RE-PAINTED W/ 50% BOARD & PAINT.

4 REINFORCED CONG. FLOOR OVER 4" GRANULAR FILL

1" WOOD GIRDERS TRIM AS REQ'D BY OWNER, TYP.

MODERITY WALL 2x4 STUDS @ 16" O.C. W/ 5/8" GYP BOARD & PAINT SWATCH. PLATFORM FRAMING W/ 1/2" PLATE GIRDERS @ 32" O.C. INTO JOISTS.

5'-9"

6'-8"

14'-10"

MAIN FLOOR ELEV.

BASEMENT FLOOR ELEV.

TOP OF ROOF ELEV.

10'-0" BOT. OF TRUSS

1'-0"

13'-9"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"

1'-0"