


- ROOF PLAN NOTES:
1. TOP OF CONCRETE SLAB SHOWN AS THIS
  2. SLAB NOTES:
  3. CONCRETE SLAB REIN. W/ #4 AT 12" AS TEMP. REIN. PERPENDICULAR TO MAIN BOTTOM REIN. IN ADDITION TO TOP & BOTTOM BARS SHOWN ON PLANS.
  4. FOR GENERAL STRUCTURAL NOTES SEE SHEET S-1
  5. FOR TYPICAL DETAILS, REFER TO SHEETS S-4
  6. FOR CONCRETE BEAM SCHEDULE, SEE SHEET S-1
  7. FOR EXACT LOCATION OF ANY OPENING AND/OR EQUIPMENT, COORDINATE WITH ARCHITECTURAL, MECHANICAL AND ELECTRICAL DRAWINGS.
  8. EXTERIOR CEILING TO BE W/ STUCCO OVER METAL LATH OVER 3/4" FELT PAPER OVER 5/8" PLYWOOD SHEATHING OVER PRE-FAB. WOOD TRUSSES W/ 8d NAILS @ 6" c/c.
  9. COORDINATE ALL FLOOR SLOPES AND ELEVATIONS WITH ARCHITECTURAL DRAWINGS.
  10. TOP OF WALL TO BE 8"X8" CONCRETE CAP REIN. WITH 2#5 CONT.
  11. LEDGER "A" DENOTES (2) 2"X10" P.T. WOOD SOUTHERN PINE#2 R FASTENED TO CONC. W/ 8" HILTI KIMB BOLTS 3 @ 12" O.C. STAGGERED & 1/2" MIN. EMBEDMENT. FULL CELL W/ GROUT.
  12. FOR RTU UNITS SUPPORT SEE DETAIL C/S-4
  13. DIAPHRAGM NAILING PATTERN AS PER DETAIL BELOW

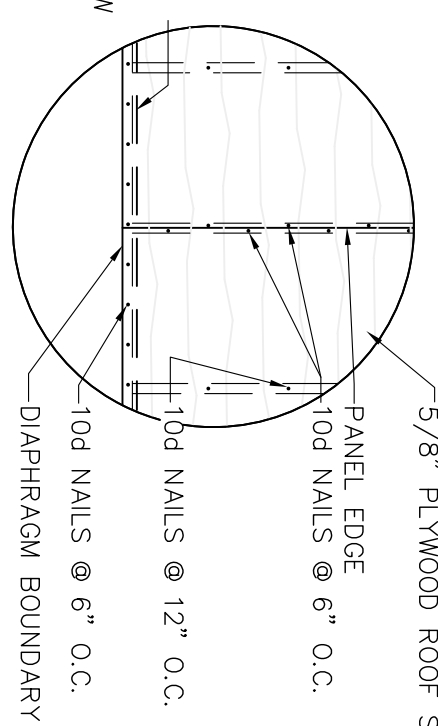

GENERAL CONTRACTOR SHALL COORDINATE ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO START ANY WORK. CONTACT E.O.R. IMMEDIATELY IF ANY DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THESE DRAWINGS.

- CONSTRUCTION SEQUENCE AT THE NEW ELEVATOR:
1. FOUNDATION WORK FOR NEW FOOTINGS. SEE PLAN.
  2. SHORING OF ALL ELEVATED STRUCTURE.
  3. INSTALLATION OF NEW STEEL BEAMS.
  4. REMOVAL OF EXISTING CONCRETE SLAB AND EXISTING AREA ON SECOND FLOOR FRAMING PLAN MADE.
  5. FORMING AND POURING OF NEW CONCRETE SLAB.
  6. FORMING AND POURING OF NEW CONCRETE SLAB.

**ROOF FRAMING PLAN**

SCALE: 1/8" = 1'-0"

